


Series ALLCHEM CNB

Volute Casing Centrifugal Pump in block design up to PN 25

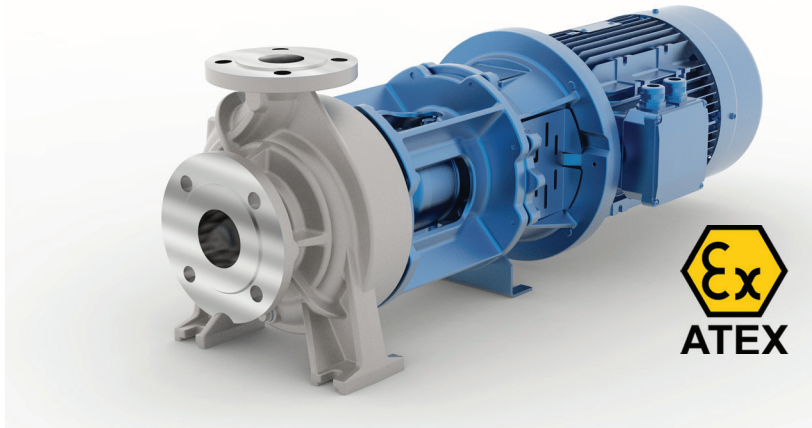

Pumped liquid

For handling aggressive or non aggressive, cold, pure or with solid contents, also viscous liquids, heat transfer liquids

Main fields of application

Used in the petrochemical and chemical industry, beverage and food industry, process engineering, environmental and wastewater technology, marine and offshore engineering, surface technology

Performance data Series ALLCHEM CNB

| | | | |
|--------------------|----|-------------|-------------------|
| Capacity | Q | up to 240 | m ³ /h |
| Delivery head | H | up to 100 | m |
| Discharge pressure | pd | up to 16/25 | bar |
| Fluid temperature | t | up to 160 | °C |

Construction features

- Casing dimension and rated output acc to DIN EN 22858/ISO 2858
- Block design (Motor attached to pump via flange or lantern)
- Vertical installation
- Horizontal installation
- Stub shaft für IEC motor

Sulteq Distributie Pompen B.V.
 Opaalstraat 60
 7554 TS Hengelo(o)
 Phone.: +31 (0) 88 25 88 900