


# Series 136.20

Two-Screw pump up to PN 10, horizontal, single-entry

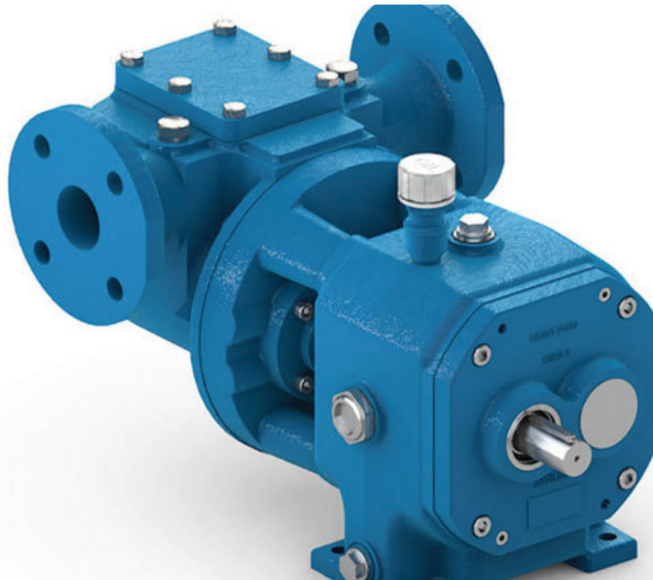

## Pumped liquid

Contaminated water, soaps and fats, paint and lacquer, food and beverage

## Main fields of application

Slurry pumps, metering pumps, transfer pumps in all industrial branches

## Performance data Series 136.20

Capacity	Q	up to 20	m <sup>3</sup> /h
Inlet pressure	ps	up to 1	bar
Discharge pressure	pd	up to 11	bar
Differential pressure	pdiff	up to 11	bar
Viscosity	v	up to 0,6..1500	mm <sup>2</sup> /s
Fluid temperature	t	up to 80	°C
Speed	n	up to 3000	1/min

## Construction features

- Built on pressure relief valve
- Horizontal installation
- Foot mounted design
- Flanges acc. DIN or ANSI

Sulteq Distributie Pompen B.V.  
 Opaalstraat 60  
 7554 TS Hengelo(o)  
 Phone.: +31 (0) 88 25 88 900