


# Series AEB-DE

Progressing Cavity Pump in block design up to PN 25

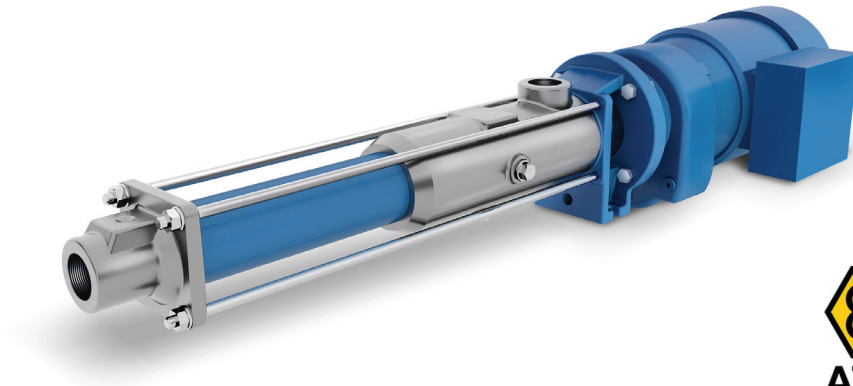

## Pumped liquid

For handling highly viscous or non-flowable, neutral or aggressive, pure or abrasive, as well as gas-containing media, also with fibrous and solids content

## Main fields of application

Sewage and environmental engineering, chemical and petrochemical industries, food and beverages industry, paper and pulp industry, soap and fats industry, dye and paint industry, plastic and ceramics industry, marine and offshore engineering, agriculture

## Performance data Series AEB-DE

Capacity	Q	up to 33	l/min
Discharge pressure	pd	up to 25	bar
Differential pressure	pdiff	up to 24	bar
Viscosity	v	up to 28000	mm <sup>2</sup> /s
Fluid temperature	t	up to 100	°C
No. Stages	-	up to -	-

## Construction features

- Block design (Motor attached to pump via flange or lantern)
- Bulkhead mounting
- Dry installation
- Vertical installation
- Horizontal installation
- Self - priming
- Reversible pumping

Sulteq Distributie Pompen B.V.  
Opaalstraat 60  
7554 TS Hengelo(o)  
Phone.: +31 (0) 88 25 88 900