


Series ALLMAG CNB-M

Volute Casing Centrifugal Pump with Magdrive in block design up to PN 25

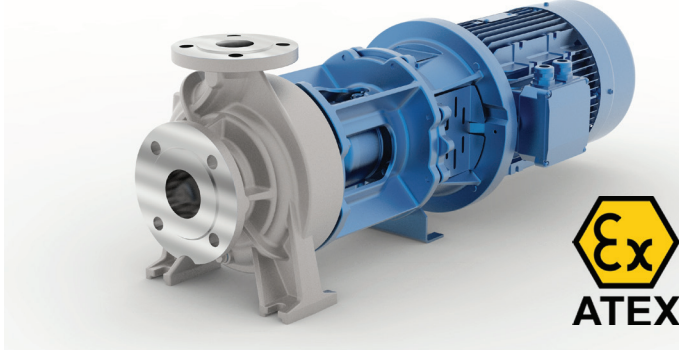

Pumped liquid

Aggressive fluids, full desalinated water etc.

Main fields of application

Process engineering and chemical industry, marine and offshore engineering (sea water desalination, chemical tanker)

Performance data Series ALLMAG CNB-M

Capacity	Q	up to 300	m ³ /h
Delivery head	H	up to 145	m
Discharge pressure	pd	up to 16/25	bar
Fluid temperature	t	up to 250	°C

Construction features

- Casing dimension and rated output acc to DIN EN 22858/ISO 2858
- Technical execution acc. DIN EN ISO 5199/ISO 5199
- Block design (Motor attached to pump via flange or lantern)
- Dry installation
- Vertical installation
- Horizontal installation
- Stub shaft für IEC motor
- With magnetic drive

Sulteq Distributie Pompen B.V.
Opaalstraat 60
7554 TS Hengelo(o)
Phone.: +31 (0) 88 25 88 900