


# Series ALLMAG CNH-M

Volute Casing Centrifugal Pump with Magdrive in base plate design up to PN 25

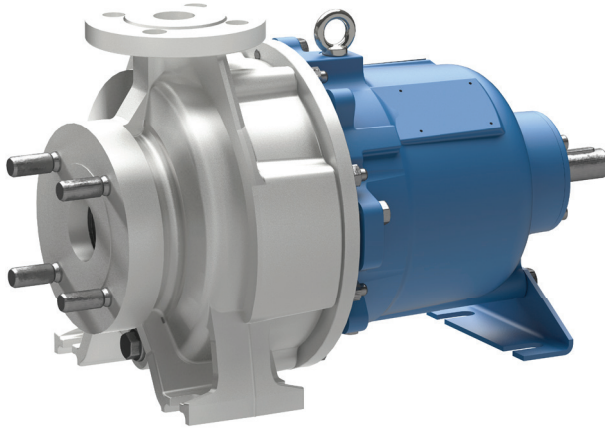

## Pumped liquid

Aggressive fluids, full desalinated water etc.

## Main fields of application

Process engineering and chemical industry, marine and offshore engineering (sea water desalination, chemical tanker)

## Performance data Series ALLMAG CNH-M

Capacity	Q	up to 650	m <sup>3</sup> /h
Delivery head	H	up to 145	m
Discharge pressure	pd	up to 16/25	bar
Fluid temperature	t	up to 170	°C

## Construction features

- Main dimensions and rated output acc to DIN EN 22858/ISO 2858
- Technical execution acc. DIN EN ISO 5199/ISO 5199
- Base plate design (pump and motor mounted on a base plate)
- Dry installation
- Horizontal installation
- Spacer coupling (optional)
- With magnetic drive

Sulteq Distributie Pompen B.V.  
Opaalstraat 60  
7554 TS Hengelo(o)  
Phone.: +31 (0) 88 25 88 900