


# Series ALL-OPTIFLOW AEB1F

Progressing Cavity Pump in block design up to PN 16

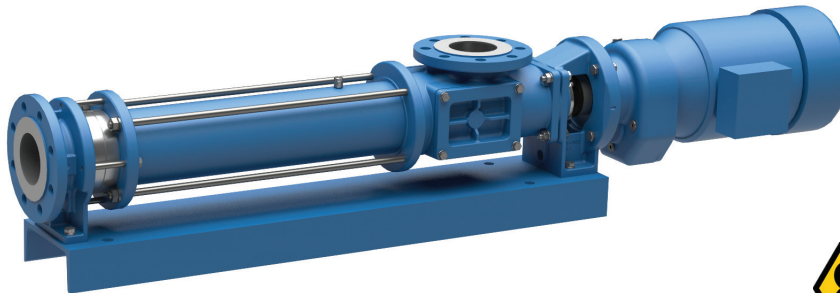

## Pumped liquid

Low to highly viscous liquids, pasty, neutral or aggressive, pure or abrasive, gaseous or tending to froth, also with fibrous and solids content

## Main fields of application

Sewage and environmental engineering, chemical and petrochemical industries, food and beverages industry, paper and pulp industry, soap and fats industry, dye and paint industry, plastic and ceramics industry, marine and offshore engineering, agriculture

## Performance data Series ALL-OPTIFLOW AEB1F

Capacity	Q	up to 3800	l/min
Discharge pressure	pd	up to 16	bar
Differential pressure	pdiff	up to 6	bar
Viscosity	v	up to 300000	mm <sup>2</sup> /s
Fluid temperature	t	up to 100	°C
No. Stages	-	up to 1	-

## Construction features

- Block design (Motor attached to pump via flange or lantern)
- Dry installation
- Vertical installation
- Horizontal installation
- Self - priming
- Reversible pumping
- 2 / 3 lobe geometry

Sulteq Distributie Pompen B.V.  
Opaalstraat 60  
7554 TS Hengelo(o)  
Phone.: +31 (0) 88 25 88 900