


Series ALL-OPTIFLOW AE1F

Progressing Cavity Pump in base plate design up to PN 16

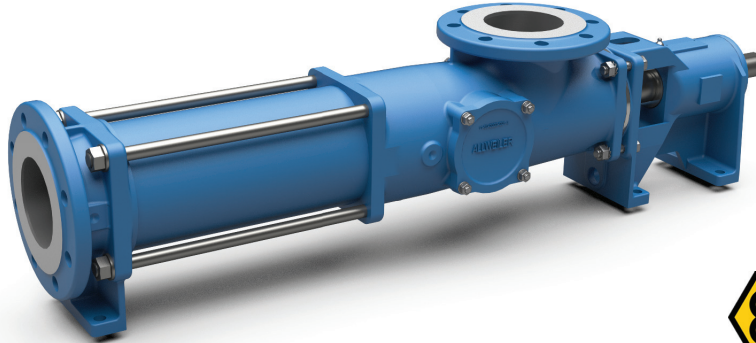

Pumped liquid

Low to highly viscous liquids, pasty, neutral or aggressive, pure or abrasive, gaseous or tending to froth, also with fibrous and solids content

Main fields of application

Sewage and environmental engineering, chemical and petrochemical industries, food and beverages industry, paper and pulp industry, soap and fats industry, dye and paint industry, plastic and ceramics industry, marine and offshore engineering, agriculture

Performance data Series ALL-OPTIFLOW AE1F

Capacity	Q	up to 3800	l/min
Discharge pressure	pd	up to 16	bar
Differential pressure	pdiff	up to 6	bar
Viscosity	v	up to 300000	mm ² /s
Fluid temperature	t	up to 135	°C
No. Stages	-	up to 1	-

Construction features

- Base plate design (pump and motor mounted on a base plate)
- Dry installation
- Vertical installation
- Horizontal installation
- Pump drive directly coupled or by gear or belt transmission
- Self - priming
- Reversible pumping
- 2 / 3 lobe geometry

Sulteq Distributie Pompen B.V.
Opaalstraat 60
7554 TS Hengelo(o)
Phone.: +31 (0) 88 25 88 900